




PRODUCT DIMENSIONS & SPECIFICATIONS

BH LIGHT COMMERCIAL SLAB HORIZONTAL COILS SINGLE OR SPLIT CIRCUIT

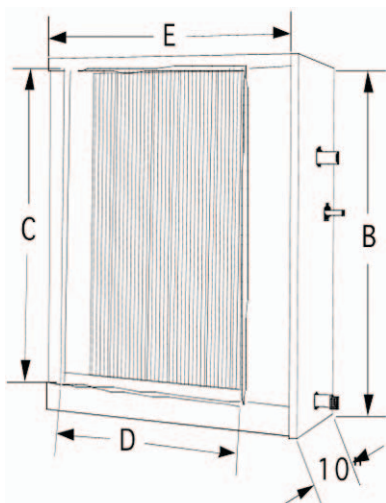

GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- One 3/4" MPT condensate drain.
- Powder-painted galvanized steel drain pan. Stainless available.
- Five-year warranty.
- Factory installed 20% bleed port TXV(s) standard. [see note for TXV options]
- Single circuit. Dual circuitry available.
- Dual circuit coils can be split top-to-bottom or interfaced.
- Front access panel for easy service.
- Every coil immersion-tested at 450 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Rifled copper tubing, enhanced aluminum fins.
- ETL listed.

Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

COIL MODEL	DIMENSIONS			
	HEIGHT [B]"	OPENING		LENGTH [E]"
		[C]"	[D]"	
BHA24 36+X*	23-1/2	21	24	29-1/2
BHA40 48+X*	23-1/2	21	29	34-1/2
BHA40 60+X*	25	21	29	34-1/2
BH132 72+X*	25-1/2	21	36	41-1/2
BH332 72+X*	25-1/2	21	42	47-1/2
BH132 90+X*	25-1/2	21	42	47-1/2
BH332 90+X*	25-1/2	21	45	50-1/2
BH132 120+X*	25-1/2	21	42	47-1/2
BH332 120+X*	25-1/2	21	45	50-1/2
BHA24 36+X* SPL	23-1/2	21	24	29-1/2
BHA40 48+X* SPL	23-1/2	21	29	34-1/2
BHA40 60+X* SPL	25	21	29	34-1/2
BH140 72+X* SPL	25-1/2	21	36	41-1/2
BH340 72+X* SPL	25-1/2	21	42	47-1/2
BH140 90+X* SPL	25-1/2	21	42	47-1/2
BH340 90+X* SPL	25-1/2	21	45	50-1/2
BH140 120+X* SPL	25-1/2	21	42	47-1/2
BH340 120+X* SPL	25-1/2	21	45	50-1/2

TXV offering (factory installed): Order X4 for R410 or X1 for R22

Phone: 281.441.6500
Toll Free: 800.423.9007
Fax: 281.441.6510
www.aspenmfg.com



* For complete warranty details visit www.aspenmfg.com.