151-153/154 QuantumOne™

Elongated Front, Pressure-Assist, Floor-Mount, Rear Outlet, SmartHeight™, Vitreous China, Two-Piece Toilet



Features

- Floor mount, rear outlet
- ADA compliant (with lever only)
- 1.0 gpf / 3.8 lpf water consumption
- Elongated front
- SmartHeight™ (16-1/2" high bowl) chair height
- High performance, high efficiency (HET), pressure-assist technology
- Model 47 chrome-plated push button actuator
- Also available wih Model 45 left hand, chrome-plated metal trip lever or Model 49 right hand, chrome-plated metal trip lever
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White and Standard Colors:
 Biscuit and Bone



Components _____

Model #	Description	Codes/Standards
151-154	Elongated front, rear outlet, pressure-assist, two-piece toilet. Less toilet seat and supply. Specify color.	
151	Elongated front, rear outlet toilet bowl only. Less toilet seat. Specify color.	HIGH EFFICIENCY TOILET
154	Pressure-assist tank and cover only with chrome-plated plastic push button actuator. Less supply. Specify color.	MaP US ADA
153	Same as model 154, except with left hand, chrome-plated, metal trip lever.	PROVIDIVI CONTROL CONT
153RH	Same as model 153, except with right hand trip lever.	






Specifications

Model #	Description	Codes/Standards	
151-153/154	Elongated front, rear outlet, floor mount two-piece toilet	ADA MPO FREMION FREMIO	

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	1-7/8"
Water Pressure Range	35 to 80 PSI	Trap Seal	2-3/4"
Flush System	Pressure-assist Flushing Technology	Rough-in	Rear Outlet
Water Usage	1.0 gpf / 3.8 lpf	Shipping Weight	Model 151 - 61 lbs.
Water Surface Area	10-1/2" X 12-1/4"		Model 154/153/153RH - 47 lbs.
MaP Rating	600 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

Technical Information

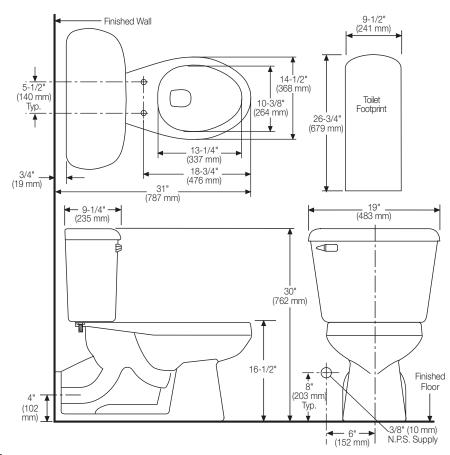

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

