



SUBMITTAL DATA SHEET

24000 Series
 4" Stainless Steel 5-25 GPM
V Series - 7 GPM

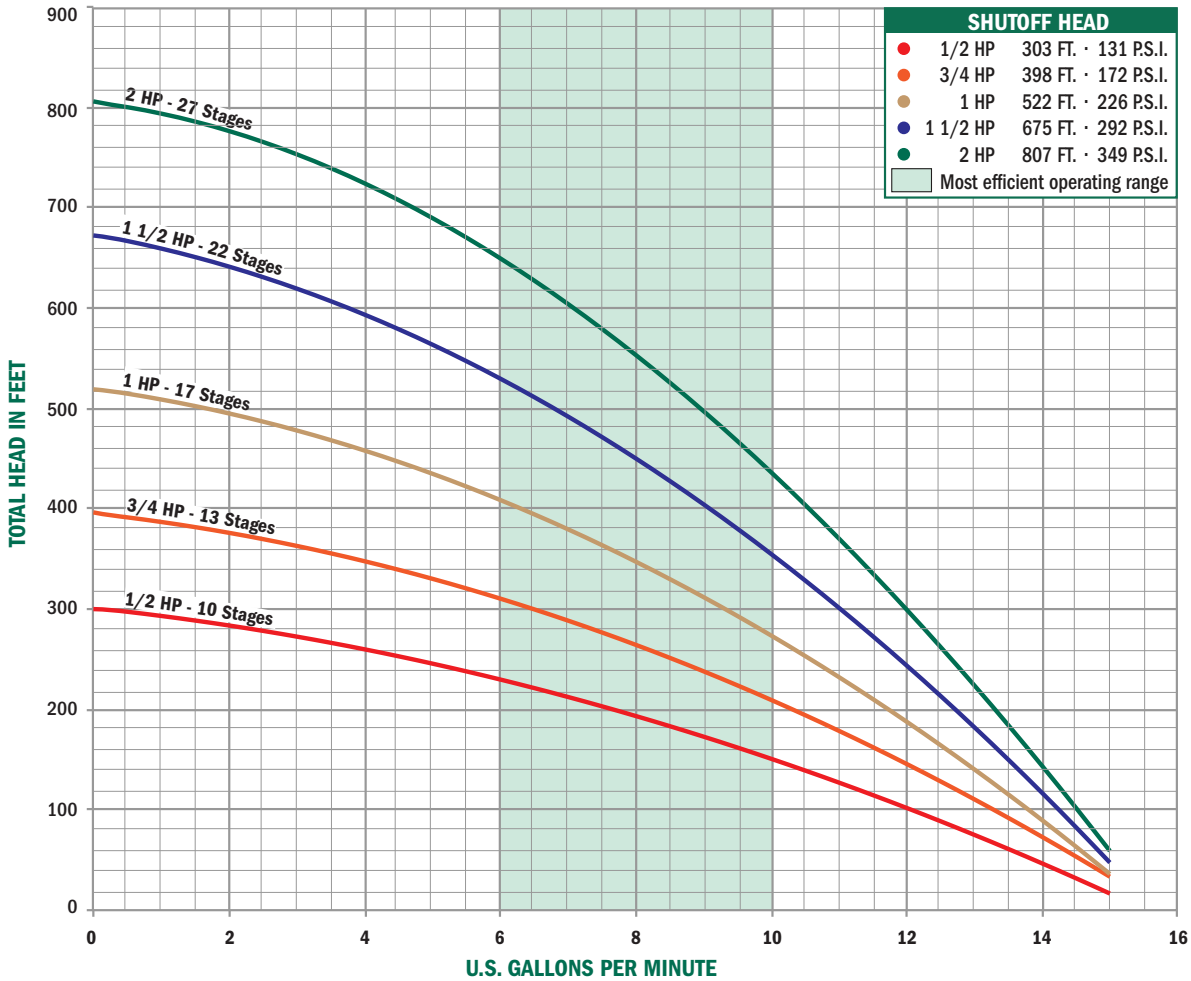

All V series submersible pumps are designed to pump within the 7 GPM range. Sizes are available from 1/2 to 2 HP. All models are standard with 1 1/4" NPT discharge.

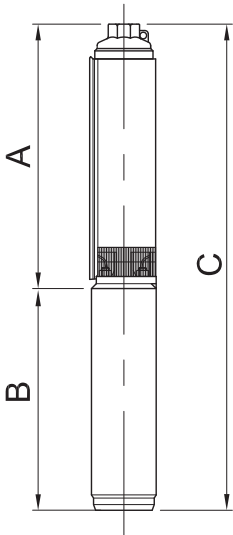

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
 P.O. Box 508
 Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
 Fax: 1-800-832-9296
 Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
 www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

24000 Series 4" Stainless Steel 5-25 GPM V Series - 7 GPM



All V series submersible pumps are designed to pump within the 7 GPM range. Sizes are available from 1/2 to 2 HP. All models are standard with 1 1/4" NPT discharge.

Models Available

Two Wire Single Phase

Model No.	HP	Stages	Volt	A	B	C	Wt.
24050V2	1/2	10	230	13.0	9.5	22.5	25.3
24050V2A	1/2	10	115	13.0	9.5	22.5	25.3
24075V2	3/4	13	230	15.2	10.6	25.8	29.4
24100V2	1	17	230	17.9	11.7	29.6	33.9
24150V2	1 1/2	22	230	21.4	15.1	36.5	42.9

Three Wire Single Phase

Model No.	HP	Stages	Volt	A	B	C	Wt.
24050V3	1/2	10	230	13.0	9.5	22.5	26.3
24050V3	1/2	10	115	13.0	9.5	22.5	26.3
24075V3	3/4	13	230	15.2	10.6	25.8	29.4
24100V3	1	17	230	17.9	11.7	29.6	33.9
24150V3	1 1/2	22	230	21.5	13.6	35.1	39.9
24200V3	2	27	230	26.6	15.1	41.7	47.5

Three Wire Three Phase

Model No.	HP	Stages	Volt	A	B	C	Wt.
24150V3Z	1 1/2	22	230	21.5	11.7	33.2	35.9
24200V3Z	2	27	230	26.6	13.6	40.2	42.5

Output - in Gallons Per Minute (Depth to Water)

1/2 HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'									
	0	14.8	14.0	13.1	12.2	11.2	10.1	9.0	7.8	6.4	4.9	3.0									
	30	12.4	11.4	10.4	9.3	8.1	6.7	5.2	3.5	1.1											
	50	10.5	9.5	8.3	7.0	5.5	3.8	1.5													
	60	9.5	8.4	7.1	5.6	3.9	1.7														
3/4 HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'	375'					
	0	15.3	14.6	14.0	13.4	12.7	11.9	11.2	10.4	9.5	8.6	7.7	6.6	5.4	4.0	2.3					
	30	13.5	12.8	12.1	11.4	10.6	9.7	8.9	7.9	6.8	5.7	4.3	2.7								
	50	12.2	11.5	10.7	9.9	9.0	8.0	7.0	5.9	4.6	3.0										
	60	11.5	10.8	9.9	9.1	8.1	7.1	6.0	4.7	3.1	1.0										
1 HP	PSI	25'	50'	75'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'	375'	400'	425'	450'	475'	500'
	0	15.2	14.8	14.3	13.8	13.4	12.8	12.3	11.8	11.2	10.6	10.0	9.4	8.7	8.0	7.2	6.4	5.5	4.5	3.3	1.8
	30	14.0	13.5	13.0	12.4	11.9	11.4	10.8	10.2	9.5	8.9	8.2	7.4	6.6	5.7	4.7	3.6	2.2			
	50	13.0	12.5	12.0	11.4	10.9	10.3	9.6	9.0	8.3	7.5	6.7	5.8	4.9	3.7	2.4					
	60	12.6	12.0	11.5	10.9	10.3	9.7	9.0	8.3	7.6	6.8	5.9	4.9	3.8	2.5						
1 1/2 HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'	650'							
	0	15.0	14.3	13.5	12.8	11.9	11.1	10.1	9.1	8.1	6.8	5.5	3.8	1.7							
	30	14.0	13.2	12.4	11.6	10.7	9.8	8.7	7.6	6.3	4.9	3.1									
	50	13.3	12.5	11.7	10.8	9.8	8.8	7.7	6.4	5.0	3.2										
	60	12.9	12.1	11.3	10.4	9.4	8.3	7.1	5.8	4.2	2.2										
2 HP	PSI	50'	100'	150'	200'	250'	300'	350'	400'	450'	500'	550'	600'	650'	700'	750'	800'				
	0	15.1	14.6	14.0	13.3	12.7	12.0	11.3	10.6	9.8	9.0	8.1	7.1	6.0	4.8	3.2	0.7				
	30	14.3	13.7	13.1	12.4	11.8	11.0	10.3	9.5	8.7	7.7	6.7	5.6	4.2	2.4	0.8					
	50	13.8	13.1	12.5	11.8	11.1	10.4	9.6	8.7	7.8	6.8	5.7	4.3	2.6							
	60	13.5	12.8	12.2	11.5	10.8	10.0	9.2	8.3	7.4	6.3	5.1	3.6	1.5							

FRICITION LOSSES IN RISER PIPE HAVE NOT BEEN CALCULATED

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: