


## LIQUIDTIGHT UF CABLE CONNECTOR

MADE OF TOUGH  
CORROSION-RESISTANT THERMOPLASTIC

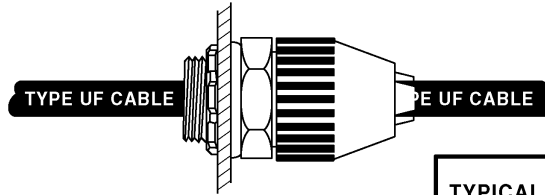

### FEATURES:


- Tapered thread seals in female hub.
- Neoprene bushing makes a liquidtight installation.
- Hand tightens - no tools needed for assembly.
- Chuck grip provides high mechanical pull out performance. Exceeds applicable requirements.
- Corrosion and weather resistant nylon is excellent for outdoor or indoor use.
- Nylon parts improve dielectric strength, provides insulated throat. Wide range means less parts, reduces inventory. (See chart)

SIZE	TYPICAL UF CABLE DIMENSION	
	MAX. (AxB)	MIN. (AxB)
14-2 w/o gnd	.420 x .212	.376 x .190
12-2 w/o gnd	.434 x .229	.408 x .205
14-2 w/gnd	.460 x .230	.418 x .190
10-2 w/o gnd	.485 x .280	.450 x .227
12-2 w/gnd	.500 x .230	.440 x .205
10-2 w/gnd	.580 x .260	.490 x .227
14-3 w/o gnd	.595 x .212	.545 x .190
12-3 w/o gnd	.640 x .230	.625 x .205
14-3 w/gnd	.680 x .220	.600 x .190
10-3 w/o gnd	.702 x .267	.670 x .227
12-3 w/ gnd	.740 x .230	.650 x .205
10-3 w/ gnd	.820 x .260	.730 x .227

### ASSEMBLY PROCEDURE

THIS CONNECTOR COMES READY TO BE USED. SIMPLY INSERT CABLE THROUGH CONNECTOR AND TIGHTEN.

CAT. NO.	TRADE OR HUB SIZE	UF CABLE RANGE	
		MAX.	MIN.
2827	1/2"	.550 x .280	.400 x .190
2828	3/4"	.675 x .280	.525 x .190
2829	3/4"	.775 x .280	.625 x .190

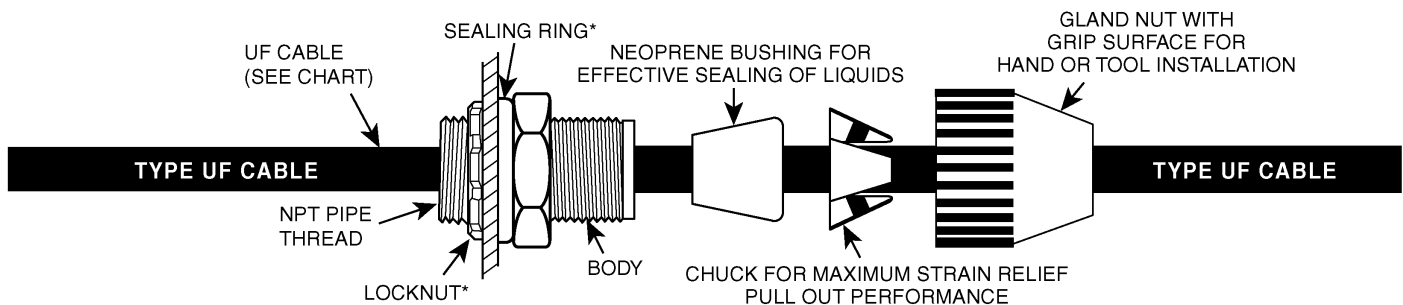

\*For knockout applications use T&B® 141 series locknuts and 5262 series sealing rings - purchase separately.

**— IMPORTANT —**  
WHEN A MINIMUM SIZE CABLE IS USED, THE GLAND NUT MUST BE FASTENED TIGHTLY AND AS CLOSE AS POSSIBLE TO SHOULDER.

**WARRANTY:** Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials and workmanship for a period of two (2) years following the date of purchase. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product or refund the purchase price. Proof of purchase is required. Misuse or unauthorized modification of the product voids all warranties.

**Limitations and Exclusions:** THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.