


50FT



100FT

Temporary string light



PROJECT: _____

DATE: _____

TYPE: _____

PREPARED BY: _____



KEY FEATURES

- **Integrated hanging hook** for easy mounting
- Durable 10 ft. cord between lamps
- **ANTI-UV protection** for sun exposure and IP65 rated
- Linkable strands **up to 390W (300ft length)** using AWG18
- Industrial grade, high-impact design **ANSI 2-prong plug** and receptacle with **weatherproof cover**
- **18,000-Hour** lifespan
- **2-Year, Limited Warranty**

PERFORMANCE

Catalog Number	Equivalency	Input Wattage	Lumen	Nominal Length	Efficacy	Color Temperature	CRI	L70 Lifespan
STRING34-50	250W Metal Halide	65W	8,000Lm	50FT	123 Lm/W	5000K	80	18,000 hr
STRING34-100	400W Metal Halide	130W	16,000Lm	100FT				

TECHNICAL SPECIFICATIONS

CONSTRUCTION

Product Type

Temporary String Light

Bulb Shape

Round

Housing Material

Polycarbonate

Finish

Orange

Base Type

Industrial grade, high-impact design ANSI 2-prong plug and receptacle with weatherproof cover

Connective Adapter

Linkable strands up to 390W (300ft length) using AWG18

Lens Finish

Frosted

Beam Angle

120°

COMPLIANCE

Environment Rating

Suitable for use in dry, damp, wet environments.

IP Rating

IP65

California Energy Commission (CEC) Status

Lawful for Sales in California

IESNA LM-79 & LM80 Testing

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

FCC

Complies with Part 15 of the FCC Rules.

RoHS

Mercury and UV free. RoHS-compliant components.

INSTALLATION METHOD

Mounting

Integrated hanging hook

TECHNICAL SPECIFICATIONS (CONT.)

ELECTRICAL

Dimmable

No

Power Factor

≥0.5

Input Voltage

120V

Operating Frequency

60Hz

Operating Temperature

-40°F to 104°F (-40°C to 40°C)

LED CHARACTERISTICS

Color Temperature

5000K

Color Accuracy (CRI)

80

R9 Value

High color performance with R9 less than or equal to 0

Color Consistency

<6-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

OTHER

Buy American Act Compliance

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Warranty

2-year limited

RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Note

All values are typical (tolerance +/- 10%)

DIMENSIONS



STRING34 - 50 FT

Weight: 3.7 lbs



STRING34 - 100 FT

Weight: 7.41 lbs

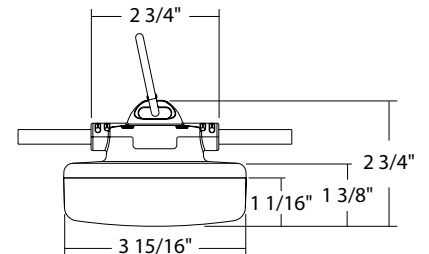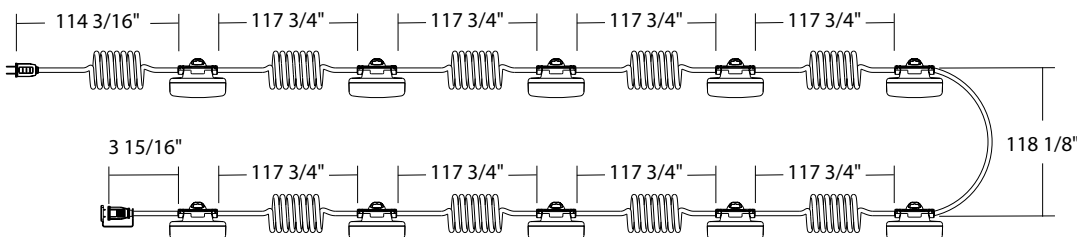

ORDERING INFO

Catalog Number	Model Number	UPC	Case Pack
STRING34-50	HS0003(STRING34-50)	192552012942	4
STRING34-100	HS0004(STRING34-100)	192552012959	2

ORDERING MATRIX

Family	Length/Wattage/Lumens
STRING34	<div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> 50 50ft/65W/8,000lm 100 100ft/130W/16,000 lm