



Aluminum Pre-Insulated Service Entrance Sleeves

Type PIK

5/8" OD



- Forged from pure aluminum with integral solid center barrier
- For insulated combinations of copper, aluminum, and ACSR
- Designed for overhead commercial service and residential installations
- Solid center barrier allows for proper conductor insertion and eliminates the effects of galvanic corrosion in aluminum to copper connections
- Easy push-thru polyethelene color coded caps seal out contaminants
- Connectors are pre-filled with oxide inhibitor to keep air and moisture out
- Aluminum insert is anchored to jacket assuring that the insert remains positioned where crimp markings are indicated
- Strip gage and number of crimps are marked on connector sleeve for ease of installation
- Nylon jacket insulates connector electrically and protects against water and weather
- Nylon jacket material increases shelf life and improves crimpability even at sub-zero temperatures
- Conforms to ANSI C 119.4 when properly installed

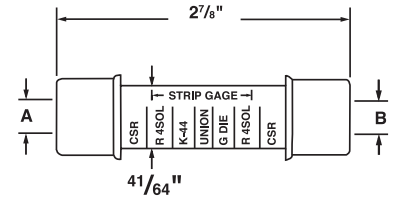

CATALOG NUMBER	A RANGE				B RANGE				DIE SIZE
	ACSR	AL OR CU STRANDED	AL OR CU SOLID	CAP COLOR	ACSR	AL OR CU STRANDED	AL OR CU SOLID	CAP COLOR	
PIK88	-	10	8	Brown	-	10	8	Brown	5/8, BG
PIK68	-	8	6	Green	-	10	8	Brown	
PIK66	-	8	6	Green	-	8	6	Green	
PIK48	6 6/1	5-6	4	Blue	-	10	8	Brown	
PIK46					-	8	6	Green	
PIK44					6 6/1	5-6	4	Blue	
PIK28	4 6/1, 7/1	3-4	2	Orange	-	10	8	Brown	
PIK26					-	8	6	Green	
PIK24					6 6/1	5-6	4	Blue	
PIK22					4 6/1, 7/1	3-4	2	Orange	
PIK18	2 6/1, 7/1	1-2	-	Red	-	10	8	Brown	
PIK16					-	8	6	Green	
PIK14					6 6/1	5-6	4	Blue	
PIK12					4 6/1, 7/1	3-4	2	Orange	
PIK11					2 6/1, 7/1	1-2	-	Red	
PIK08	-	1/0	-	Yellow	-	10	8	Brown	
PIK06					-	8	6	Green	
PIK04					6 6/1	5-6	4	Blue	
PIK02					4 6/1, 7/1	3-4	2	Orange	
PIK01					2 6/1, 7/1	1-2	-	Red	
PIK00					-	1/0	-	Yellow	



UTILITY CONNECTORS / OVERHEAD

Aluminum Pre-Insulated Service Entrance Sleeves

Type PIK

.840" OD

- Forged from pure aluminum with integral solid center barrier
- For insulated combinations of copper, aluminum, and ACSR
- Designed for overhead commercial service and residential installations
- Solid center barrier allows for proper conductor insertion and eliminates the effects of galvanic corrosion in aluminum to copper connections
- Easy push-thru polyethelene color coded caps seal out contaminants
- Connectors are pre-filled with oxide inhibitor to keep air and moisture out
- Aluminum insert is anchored to jacket assuring that the insert remains positioned where crimp markings are indicated
- Strip gage and number of crimps are marked on connector sleeve for ease of installation
- Nylon jacket insulates connector electrically and protects against water and weather
- Nylon jacket material increases shelf life and improves crimpability even at sub-zero temperatures
- Conforms to ANSI C 119.4 when properly installed

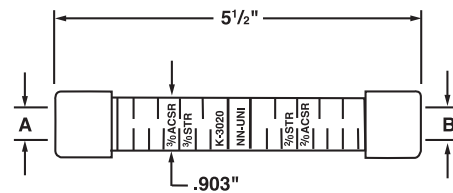

CATALOG NUMBER	A RANGE			B RANGE				DIE SIZE	
	ACSR	AL OR CU STRANDED	CAP COLOR	ACSR	AL OR CU STRANDED	AL OR CU SOLID	CAP COLOR	HAND	HYD.
PIK01R	1/0 6/1	1/0	Yellow	2	1-2	1/0	Red	.840	249, EEI 11A
PIK00R				1/0	1/0	-	Yellow		
PIK204	2/0 6/1	2/0	Gray	6	5-6	4	Blue		
PIK202				4	3-4	2	Orange		
PIK201				2	1-2	1/0	Red		
PIK200				1/0	1/0	-	Yellow		
PIK2020				2/0	2/0	-	Gray		
PIK302				3/0 6/1	3/0	Black	4		
PIK301	2	1-2	1/0				Red		
PIK300	1/0	1/0	-				Yellow		
PIK3020	2/0	2/0	-				Gray		
PIK3030	3/0	3/0	-				Black		
PIK402	4/0 6/1	4/0	Pink	4	3-4	2	Orange		
PIK401				2	1-2	1/0	Red		
PIK400				1/0	1/0	-	Yellow		
PIK4020				2/0	2/0	-	Gray		
PIK4030				3/0	3/0	-	Black		
PIK4040				4/0	4/0	-	Pink		