

WATER FILTRATION YOU CAN TRUST.

The Delta® Clarifi™ Tankless Reverse Osmosis System is certified to filter out more than 90 contaminants from your drinking water, including lead, microplastics, chemicals, pharmaceuticals, nitrates, and heavy metals. Tested and certified against NSF International standards, Clarifi™ Tankless Reverse Osmosis is designed for reliable, easy-to-use in-home water filtration.

SCAN TO VIEW VIDEO TUTORIALS



Installation



How to Change
the Filters



Troubleshooting

FIND VIDEO TUTORIALS AT:

<https://www.youtube.com/@deltafaucet>

TRACK YOUR FILTER MAINTENANCE

FILTER NAME	DATE CHANGED

FILTER NAME	DATE CHANGED



ADD TO YOUR SYSTEM (SEPARATE PURCHASE)

CLARIFI™ REMINERALIZER CARTRIDGE

While the Clarifi™ Tankless Reverse Osmosis System removes contaminants from your drinking water, it also removes the naturally occurring minerals that give water its refreshing, crisp taste. The remineralizer cartridge adds those good-for-you minerals, like calcium and magnesium, back into your filtered drinking water.



REGISTER YOUR PRODUCT HERE:

<https://www.deltafaucet.com/service-parts/product-registration>

For live customer support: 800-345-3358



see what Delta can do™

115976 Rev A 03/24

CLARIFI™

TANKLESS REVERSE OSMOSIS SYSTEM

USER GUIDE




see what Delta can do™

YOUR REVERSE OSMOSIS SYSTEM


■ INCLUDED IN THE BOX

■ NOT INCLUDED IN THE BOX

- RO faucet with Air Gap
- RO faucet with Air Gap waste line
- Cold water supply stop
- Standard faucet

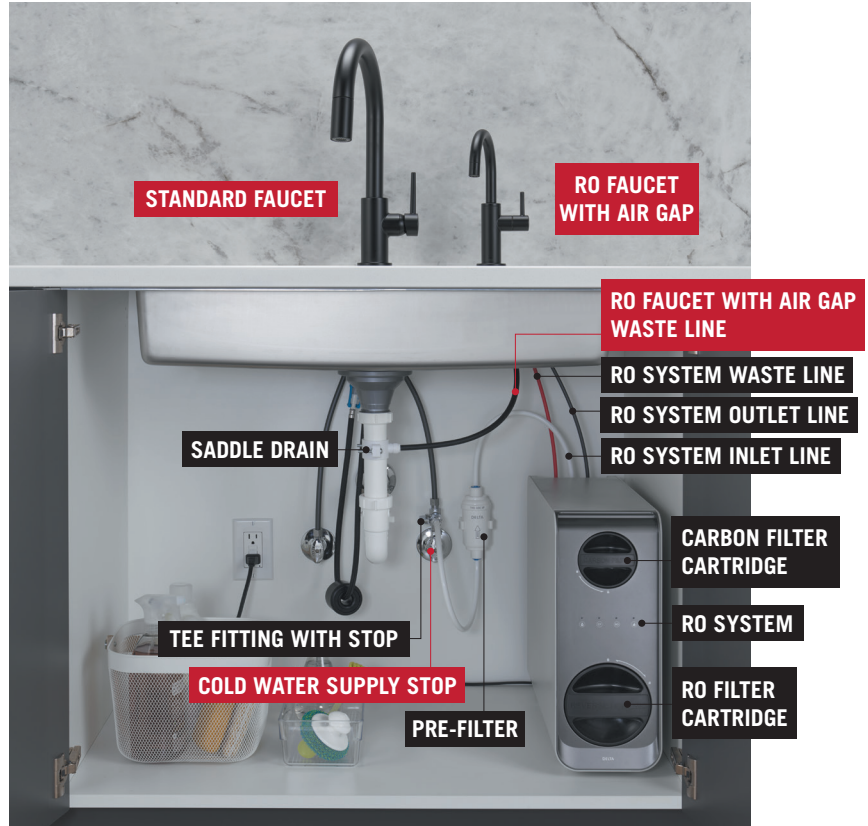

CARTRIDGES MAY ROTATE DURING SHIPPING.



Confirm correct orientation before use.



CHANGING THE FILTERS



Reorder
Carbon Filter



CLARIFI™ CARBON FILTER CARTRIDGE

FILTER LIFE:
24 months or
1,320 gallons



Reorder
Reverse
Osmosis
Filter



CLARIFI™ REVERSE OSMOSIS FILTER CARTRIDGE

FILTER LIFE:
24 months or
1,320 gallons



Reorder
Pre-filter



CLARIFI™ PRE-FILTER

FILTER LIFE:
6 years or
3,960 gallons

HOW TO REPLACE CARBON FILTER CARTRIDGE AND REVERSE OSMOSIS FILTER CARTRIDGE

- Rotate handle counterclockwise to unlock and pull cartridge out
- Insert new cartridges with handle oriented vertically
- Rotate cartridge clockwise to lock in place
- Handle should be horizontal and flush with front panel when fully installed
- Manually reset each filter life by pressing icon under its indicator light for 5 seconds
- Repeat for each filter
- System will beep once to signal successful reset
- After replacing both cartridges, turn on faucet and manually flush system for 30 minutes to break in new filters

HOW TO REPLACE PRE-FILTER

- Turn off water supply from tee fitting
- Turn on Reverse Osmosis faucet
- Unplug power cord while faucet is on
- Turn off faucet
- Disconnect pre-filter by compressing fitting flange while pulling tubing straight out
- Insert new pre-filter using push-to-connect fittings
- Turn on water supply line, plug in power cord and inspect for leaks



Refer to the installation instructions for more details on replacement, if needed.



How To
Change Filters

Record installation date for future reference to help maintain replacement schedule.

INDICATORS



WATER INDICATOR

The indicator light will be blue while filtering water. It will turn off when water is not being dispensed.



FILTER LIFE INDICATOR

- Solid Blue: Filter life is normal.
- Solid Purple: Filter life will expire soon.*
- Solid Red: Filter life has expired.*



FILTERED OUTLET WATER QUALITY INDICATOR

- Solid Blue: Low amount of TDS
- Solid Purple: Medium amount of TDS
- Solid Red: High amount of TDS

If an indicator is blinking or flashing, consult the user manual.

SOUND

The unit will **beep twice** per use when the filter is nearing end of life.* It will **beep constantly** during use once the filter is exhausted.

*We recommend to order replacements at this time.