4987-2987 **VANQUISH**® **1.28**

MANSFIELD®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- 1.28 gpf / 4.8 lpf low water consumption
- · Revolutionary seat design with side-mount hinges for easy cleaning
- · PuraClean® easy-to-clean glazed surface
- Elongated front, SmartHeight[™] bowl
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Fluidmaster® Pilot anti-siphon fill valve
- 12' rough-in
- SmartFasten[™] 2-bolt tank-to-bowl connection
- · Model 39 decorative metal trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim & seat
- · Available in white



Available as CTK

COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
4987-2987	Elongated front, SmartHeight™, two-piece toilet. Less supply.			
4987	Elongated front, SmartHeight™ bowl with side-mount seat.			
2987	Tank and lid only. With left hand, chrome-plated metal trip lever. Less supply.	ADA COMPLIANT		
SB4000	Patented slow close seat with side-mount hinges*			
TANK TRIM & REPLACEMENT PARTS				
39	Trip Lever - chrome-plated metal trip lever, left hand			
400A	Fluidmaster® Pilot anti-siphon fill valve (Mansfield 2206 is an equivalent replacement)			
2987-1112	3' Rigid Flapper flush valve			
630-0030	Replacement flush valve seal			
3987-LID	Tank Lid			

4987-2987 **VANQUISH**® **1.28**

MANSFIELD®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4987-2987	Elongated front, SmartHeight™ (1.28 gpf/4.8 lpf) two-piece toilet	ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	SmartFlush™ Flushing Technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8' X 7'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 4987 (w/seat) - 63 lbs. (28.6 kg) Model 2987 - 35 lbs. (15.9 kg
WARRANTY	Vitreous China - Limited Lifetime Tank Trim & Seat - Limited Five-Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

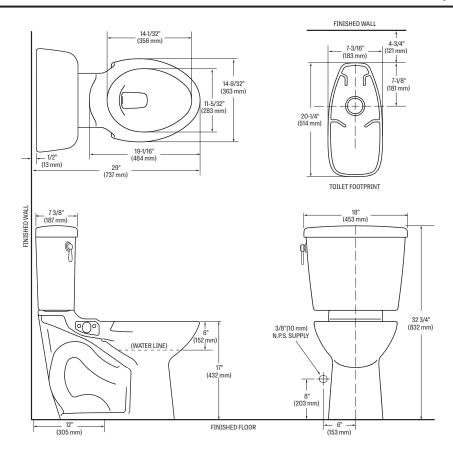

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.