### For Residential and Commercial Applications

| Job Name       | Engineer / Architect |  |
|----------------|----------------------|--|
| Job Location   | Wholesaler           |  |
| Submittal Date | Contractor           |  |

## KTBRPX14 1/4 Turn Straight Ball Stop – Barbed PEX x Compression

*Use:* For use in potable water distribution systems in accessible locations only.

#### **Design Features:**


- Machined brass ball is specially engineered and mated with fluorocarbon seats to provide smooth operation without freeze ups even after long periods of non-use
- Two high-performance o-rings withstand high temperatures and corrosion from harsh water environments
- Machined, one-piece brass body provides strength, durability, and long-lasting performance
- Brass stem is assembled from the inside out with two o-rings to ensure safe, reliable performance
- Plated stem provides corrosion resistance and prevents o-ring damage after long periods of non-use
- Exclusive, metal handle is designed for durability, corrosion resistance, & a sleek appearance
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins
- 100% Leak tested
- No Lead
- PEX end designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807, and/or F2098 connection methods

#### **Operating Specifications:**


*Temperature:* 40°- 180° F

**Pressure:** 125 PSI maximum

| STOP MATERIAL SPECIFICATIONS |                              |  |  |
|------------------------------|------------------------------|--|--|
| Body                         | Brass, chrome plated         |  |  |
| Stem                         | Brass, plated                |  |  |
| Seat                         | Fluorocarbon                 |  |  |
| Ball                         | Brass, plated                |  |  |
| O-ring                       | Rubber                       |  |  |
| Handle                       | Zinc die cast, chrome plated |  |  |
| Handle Screw                 | Zinc-plated steel            |  |  |
| Compression Nut              | Brass, chrome plated         |  |  |
| Compression Sleeve           | Brass                        |  |  |








# KTBRPX14 1/4 Turn Straight Ball Stop – Barbed PEX x Compression

#### Part Listing:

KTBRPX14X C

1/2" nom crimp barb x 3/8" OD compression, chrome plated

| PART DIMENSIONS (Inches) |        |        |  |  |
|--------------------------|--------|--------|--|--|
| Model                    | DIM. A | DIM. B |  |  |
| KTBRPX14X                | 1.14   | 2.22   |  |  |

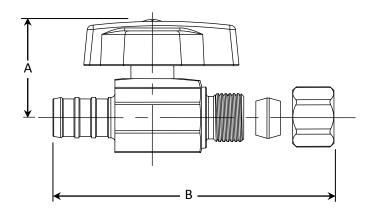

#### **Listings & Certifications:**

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No-Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01









