



Friendly Service ... Powerful Solutions


Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid LB Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing and maintenance



E170258

TOPAZ CAT #	A	B	C	Max No. Conductors
LB1CG	4.295	2.150	1.330	1 #6AWG
LB2CG	5.090	2.430	1.540	2 #6AWG
LB3CG	5.915	2.765	1.740	3 #6AWG
LB4CG	7.894	3.665	2.490	3 #2AWG
LB5CG	7.894	3.665	2.490	3 #2AWG
LB6CG	10.134	4.275	3.100	3 #2/OAWG
LB7CG	12.500	5.437	4.450	3 #2/OAWG
LB8CG	12.500	5.675	4.450	3 #4/OAWG
LB9CG	15.500	6.922	5.500	3 #500MCM
LB10CG	15.500	6.922	5.500	3 #500MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
LB1CG	20841	1/2"	10	100	34
LB2CG	20851	3/4"	10	50	23
LB3CG	20861	1"	5	25	19
LB4CG	20871	1 1/4"	2	10	14
LB5CG	20881	1 1/2"	2	10	15
LB6CG	20891	2"	1	5	14
LB7CG	20901	2 1/2"	-	1	7
LB8CG	20911	3"	-	1	7
LB9CG	20921	3 1/2"	-	1	10
LB10CG	20931	4"	-	1	10

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488



Friendly Service ... Powerful Solutions


Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid LL Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing and maintenance

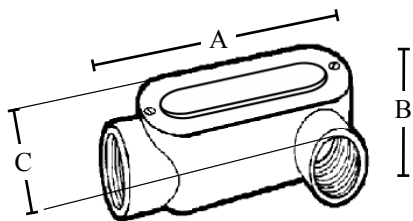

TOPAZ CAT #	A	B	C	Max No. Conductors
LL1CG	4.295	1.370	2.030	1 #6AWG
LL2CG	5.090	1.625	2.330	2 #6AWG
LL3CG	5.915	1.900	2.650	3 #6AWG
LL4CG	7.894	2.770	3.385	3 #2AWG
LL5CG	7.894	2.770	3.385	3 #2AWG
LL6CG	10.134	3.335	3.810	3 #2/0AWG
LL7CG	13.000	4.063	5.709	3 #4/0AWG
LL8CG	12.750	4.682	5.506	3 #250MCM
LL9CG	15.500	5.452	6.171	3 #350MCM
LL10CG	15.500	5.452	6.171	4 #350MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
LL1CG	21041	1/2"	10	100	36
LL2CG	21051	3/4"	10	50	23
LLCG	21061	1"	5	25	19
LL4CG	21071	1 1/4"	2	10	15
LL5CG	21081	1 1/2"	2	10	16
LL6CG	21091	2"	1	5	14
LL7CG	21101	2 1/2"	-	1	7
LL8CG	21111	3"	-	1	7
LL9CG	21121	3 1/2"	-	1	10
LL10CG	21131	4"	-	1	10

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488



Friendly Service ... Powerful Solutions


Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid LR Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing and maintenance

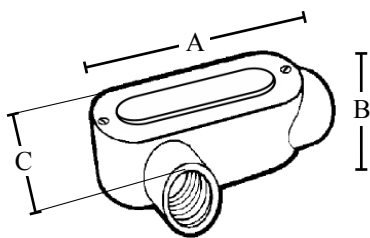

E170258

TOPAZ CAT #	A	B	C	Max No. Conductors
LR1CG	4.295	1.370	2.030	1 #6AWG
LR2CG	5.090	1.625	2.330	2 #6AWG
LR3CG	5.915	1.900	2.650	3 #6AWG
LR4CG	7.894	2.770	3.385	3 #2AWG
LR5CG	7.894	2.770	3.385	3 #2AWG
LR6CG	10.134	3.335	3.810	3 #2/OAWG
LR7CG	13.000	4.063	5.709	3 #4/OAWG
LR8CG	12.750	4.682	5.506	3 #250MCM
LR9CG	15.500	5.452	6.171	3 #350MCM
LR10CG	15.500	5.452	6.171	4 #350MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
LR1CG	21241	1/2"	10	100	36
LR2CG	21251	3/4"	10	50	28
LR3CG	21261	1"	5	25	17
LR4CG	21271	1 1/4"	2	10	15
LR5CG	21281	1 1/2"	2	10	18
LR6CG	21291	2"	1	5	14
LR7CG	21301	2 1/2"	-	1	7
LR8CG	21311	3"	-	1	7
LR9CG	21321	3 1/2"	-	1	10
LR10CG	21331	4"	-	1	10

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488



Friendly Service ... Powerful Solutions


Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid C Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing and maintenance

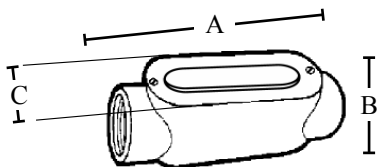

TOPAZ CAT #	A	B	C	Max No. Conductors
C1CG	4.720	1.370	1.330	1 #6AWG
C2CG	5.570	1.625	1.540	2 #6AWG
C3CG	6.460	1.900	1.740	3 #6AWG
C4CG	8.528	2.770	2.490	3 #2AWG
C5CG	8.528	2.770	2.490	3 #2AWG
C6CG	10.831	3.335	3.100	3 #2/OAWG
C7CG	13.500	4.060	4.450	3 #4/OAWG
C8CG	13.500	4.685	4.450	3 #250MCM
C9CG	15.937	5.450	5.500	3 #350MCM
C10CG	15.937	5.450	5.500	4 #350MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
C1CG	19901	1/2"	10	100	30
C2CG	19911	3/4"	10	50	25
C3CG	19921	1"	5	25	18
C4CG	19931	1 1/4"	2	10	17
C5CG	19941	1 1/2"	2	10	19
C6CG	19951	2"	1	5	14
C7CG	19961	2 1/2"	-	1	7
C8CG	19971	3"	-	1	7
C9CG	19981	3 1/2"	-	1	10
C10CG	19991	4"	-	1	10

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488



Friendly Service... Powerful Solutions


Topaz Specification Sheet

Description: Rigid Conduit Bodies with Cover and Gasket - Rigid T Type

Standard Material: Aluminum Die Cast Copper Free
Cover stamped steel
Gasket - Neoprene Rubber

Features: Tapered threaded hubs - NPT
Suitable for use in concrete.
Wet Location

Application: To provide access to conductors for pulling, slicing and maintenance

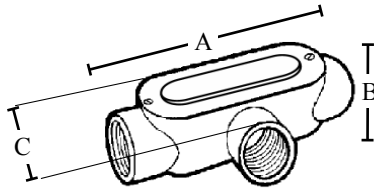

TOPAZ CAT #	A	B	C	Max No. Conductors
T1CG	4.720	1.370	1.330	1 #6AWG
T2CG	5.570	1.625	1.540	2 #6AWG
T3CG	6.460	1.900	1.740	3 #6AWG
T4CG	8.528	2.770	2.490	3 #2AWG
T5CG	8.528	2.770	2.490	3 #2AWG
T6CG	10.831	3.335	3.100	3 #2/OAWG
T7CG	13.500	4.060	5.825	3 #4/OAWG
T8CG	13.500	4.685	5.825	3 #250MCM
T9CG	15.937	5.450	7.060	3 #350MCM
T10CG	15.937	5.450	7.060	4 #350MCM

TOPAZ CAT #	UPC#	SIZE	UNIT CTN	SHIP CASE	WT/ CASE
T1CG	21731	1/2"	10	100	38
T2CG	21741	3/4"	10	50	30
T3CG	21751	1"	5	25	20
T4CG	21761	1 1/4"	2	10	19
T5CG	21771	1 1/2"	2	10	21
T6CG	21781	2"	-	2	5
T7CG	21791	2 1/2"	-	1	8
T8CG	21801	3"	-	1	8
T9CG	21811	3 1/2"	-	1	11
T10CG	21821	4"	-	1	11

Approved by Quality Control: John Cavalieri



NEW YORK
925 Waverly Avenue
Holtsville, NY 11742
800-666-2852
Fax: 800-333-3488

CALIFORNIA
225 Parkside Drive
San Fernando, CA 91340
888-551-2852
Fax: 888-690-2852

FLORIDA
2020 West 26th Street
Jacksonville, FL 32209
800-666-2852
Fax: 800-333-3488