


EZ-TRAP® EZT226

Product Code 83226

Kit Contents

- (A) 3/4" Adaptor (1)
- (B) 1" x 3/4" Slip Female Street Ell (1)
- (C) Float Switch Assembly (1)
- (D) 72" Modular Cable (1)
- Red/Blue Service Label (1)

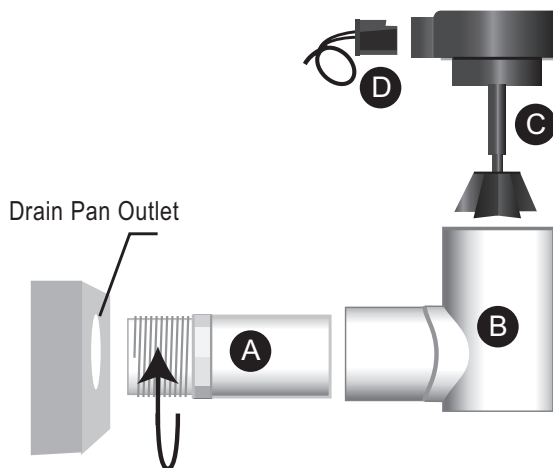

Important:

Install in accordance with RectorSeal® instructions as well as all applicable local plumbing, drainage and electrical codes.


Overflow Switch Assembly Instructions

1. Screw Adaptor (A) into 3/4" drain pan overflow outlet.
2. Glue Street Ell (B) to Adaptor (A). Assembly must be plumb.
3. Press fit Float Switch Assembly (C) into 1" opening at top of Street Ell (B). DO NOT USE GLUE. Check that Actuator Arm and Float moves freely inside Ell.
4. Press plug end of Modular Cable (D) into Float Switch Assembly (C).
5. Attach service & cleaning labels as indicated.

Note: Insulation is required when trap is installed in unconditioned space where sweating can occur.

Wiring Instructions

1. Turn off electrical power at main panel before installing EZ Trap switch.
2. An in-line fuse is necessary to protect the 24V circuit.
3. Connect Float Switch using wiring diagram. (below)
4. Test system for proper operation by lifting float.



Note: Wiring diagram shown cuts power to thermostat when float switch operates to stop operation of the A/C unit. To inhibit mold growth during long absences, connect terminals into yellow cooling circuit so when float switch operates, condenser will switch off but fan will continue running.

Operating Procedure

Should blockage occur in the condensate drain line, the float will lift to stop operation. To reset, press center button on switch.